

DATASHEET

Rockfon® Artic+



Sounds Beautiful

Rockfon® Artic+

- A good and economical tile for most applications.
- Offers an appealing visual finish for everyday spaces.
- Provides Class A sound absorption for good noise control in busy environments.
- Comes in a basic range of tile dimensions in semi-concealed and visible grid options.
- Simplifies maintenance in areas where cleanliness is important.
- Built with robust stone wool, A1 non-combustible and moisture resistant.

Product Description

- Stone wool tile
- Visible side: smooth white painted fleece
- Rear Side: back fleece

Application Areas

- Office
- Retail
- Education

Edges	Module size (mm)	Weight (kg/m²)	MS / MS Easy Access (mm)	Recommended installation System	Recycled Content	A1-A3 Production stage impact (kg CO ₂ eq/m²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m²)*
 A15	600 x 600 x 15	2.0	50/100	Rockfon® System T15 A	56%	1.62	2.08
 A24	600 x 600 x 15	2.0	50/100	Rockfon® System T24 A	56%	1.62	2.08
			50/100	Rockfon® System XL T24 A			
	1200 x 600 x 15		50/100	Rockfon® System T24 A			
 E15	600 x 600 x 15	2.0	58/100	Rockfon® System T15 E	56%	2.10	2.63
			100/100	Rockfon® System Ultraline E			
 E24	600 x 600 x 15	2.0	58/100	Rockfon® System T24 E	56%	2.10	2.63
			58/100	Rockfon® System XL T24 E			
	1200 x 600 x 15		58/100	Rockfon® System T24 E			

MS = Minimum Suspension


* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : 0.95 (Class A)

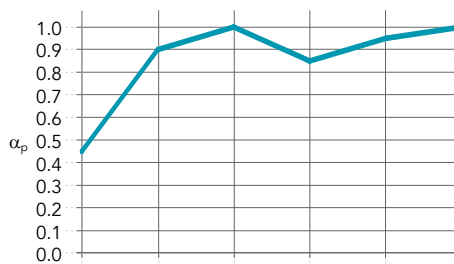

Edge /
 Thickness (mm) /
 Suspension (incl. tile - mm)

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
A,E: 15 / 200	0.45	0.90	1.00	0.85	0.95	1.00	0.95	A	0.95



Reaction to fire
 A1



Fire Resistance
 The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms depending on requirements in building codes. Some sizes and edge details of Rockfon Artic can be used with various Chicago Metallic grids and Rockfon systems to create a 30 minutes fire protecting ceiling in accordance with BS 476 Part 21 and Part 23.



Light reflection
 83 %



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity
 C/0N



Cleaning
 - Vacuum
 - Damp cloth (occasional clean)



Hygiene
 Stone wool provides no sustenance to microorganisms



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

Sounds Beautiful

